




portable flooring solutions

# PFS-MAX

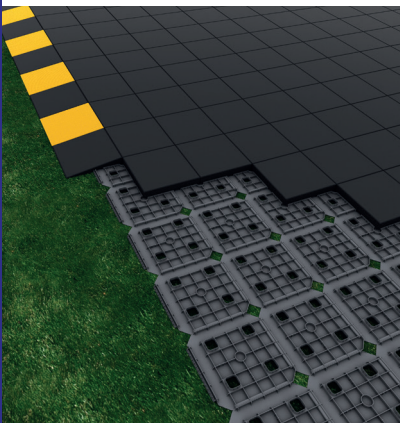

Portable heavy duty platform  
designed for heavy traffic



**PFS Europe bv**  
Schutboomstraat 30  
5402 LL Uden, Netherlands



**T:** +31(0)413 25 66 44 (office)  
**T:** +31(0)416 74 71 13 (factory-visits)  
**M:** +31(0)6 519 810 37  
**E:** [info@pfseurope.com](mailto:info@pfseurope.com)  
**I:** [www.pfseurope.com](http://www.pfseurope.com)

- Stadiums & concerts
- Portable roadways
- Removable road humps
- Portable speed bumps
- Vehicle access
- Building sites



# PFS-MAX

Provide the optimum solution  
for a multi-propose venue

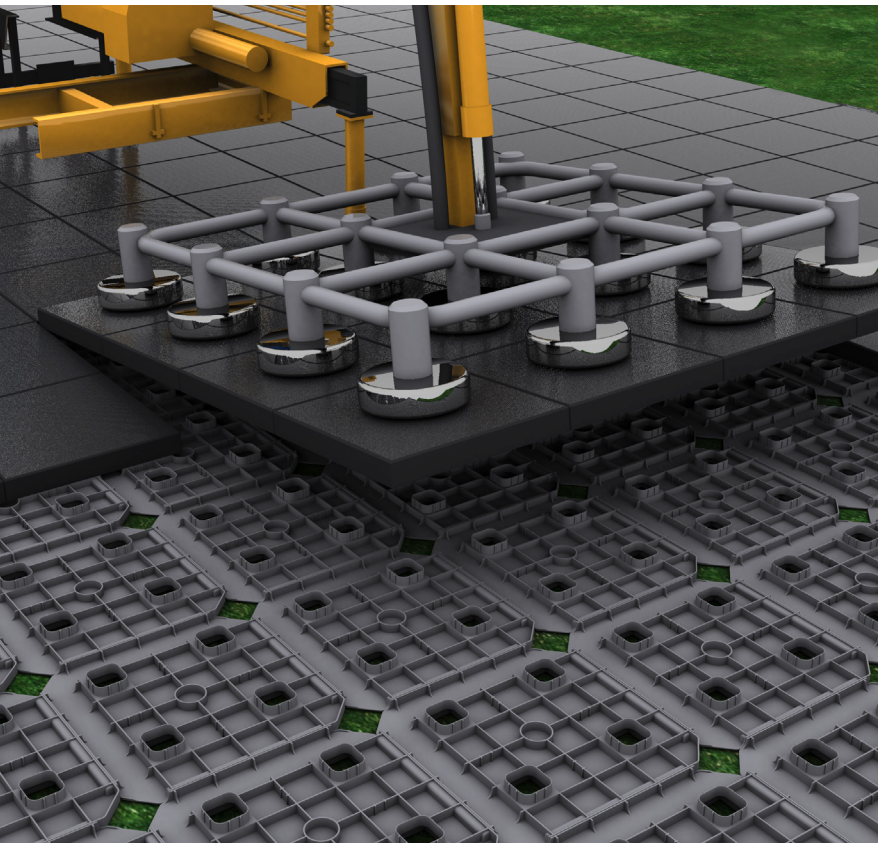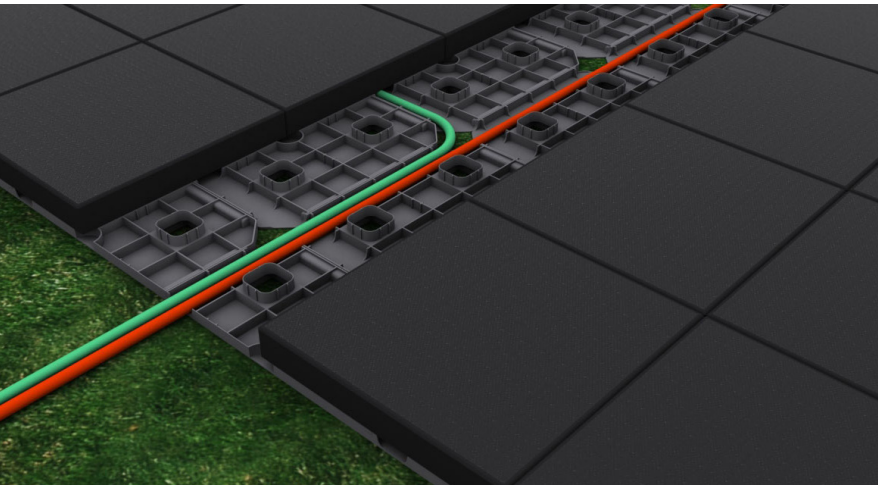

## FEATURES

- Easy to install lightweight panels, quick to fit without specialised equipment
- Load-dispersing to accommodate heavy machinery
- Protect sports turf profiles, accommodates uneven grounds
- Skid-resistant surface
- Rugged, reusable and recyclable

## USES

- Temporary access enabling construction of stages for concerts and events in stadia
- Work areas where heavy loads need to be distributed e.g. crane platforms
- Portable roadways for heavy vehicles
- Military operations
- Golf course maintenance
- Traffic control management

## PRO-MAX<sup>®</sup>

- Pro-Max **1** Under structure
- Pro-Max **2** Solid top version
- Pro-Max **3** Integrated self aligning edges

## TECHNICAL DATA

<b>MATERIAL</b>	High-Density polyethylene (HDPE)
<b>UV STABILISED</b>	Protected against excessive colour fading and deterioration
<b>TILE SIZE</b>	66 x 66 cm, thickness: 8 cm
<b>WEIGHT</b>	Each 1 m <sup>2</sup> weights approx. 23 kgs
<b>SURFACE</b>	Skid-resistant surface helps ensure traction for people and equipment
<b>LOAD FACTOR</b>	Can support compressive loads of vehicles up to 120 tonnes on firm subsurface
<b>CLEANING</b>	May be swept, mopped, scrubbed and pressure-washed, resistant to most common detergents and cleaning fluids
<b>SERVICE LIFE</b>	Between 10 - 12 years (under normal conditions)
<b>INSTALLATION</b>	Can be installed manually in a few hours by unskilled workers with no experience with the Pro-Max <sup>®</sup> system, in addition, the tiles can be easily assembled and installed by use of machinery
<b>INSTALLATION RATE</b>	Approx. 100 m <sup>2</sup> / hour / men
<b>COLOURS</b>	Black, Grey, Yellow, custom colours available on request at additional cost
<b>ACCESSORIES</b>	No stabilisers, locks, clips or moving parts needed, nothing to lose, break or damage
<b>CABLES</b>	Space between Pro-Max 1 and Pro-Max 2 for cable guiding