



Product:- Pro-Zone™ HD (new)

Description:- Injection moulded HDPE heavy duty panels with overlapping edges, locked together with camlocks to form a contiguous platform. Integral and interlocking ramps available for both edges.

Uses:- Temporary access roads, loading platforms, workshop and temporary warehousing floors, stage builds, crane platforms, marquee floors, military operations


Origin:- Australia, Europe and China

H Code:- 3918.90.00

Specifications:-

Dimensions		
External		1.15m(L) x 1.15m(W) x 0.075m(D)
Useable surface when interlocked		1m x 1m
Weight		23kg
Slip resistance		R10
Fire Rated		UL94HB
Load rating		3500kPa
		357 tonne/m ²
		507 psi
Dynamic loads		Above ratings are based on static loads on a firm sub-base. Always allow a conservative margin for softer ground and dynamic loads

Drawings:-

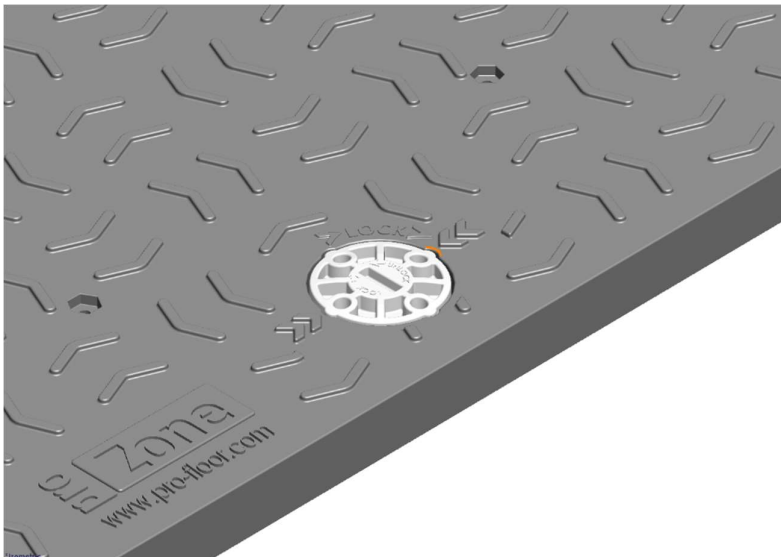

Photos:-

